


SPECIFICATIONS

Boom	5 sections, ZR
Max output	150 m ³ /h
Pressure	69 bar.
Delivery cylinder	230 x 2100
Hopper capacity	600 liters
N° of strokes/min.	28/30
Vertical reach	51.3 m
Horizontal reach	47.5 m
Front outrigger	9.1 m
Front outrigger	X-type / Vertical Extension
Rear outrigger	10.6 m
Rear outrigger	Swing / Vertical Extension
Boom control valve	Proportional (HAWE)
Remote control	HBC
Water tank capacity	500 liters
Rotation	370°



Illustration picture

WORKING DIAGRAM

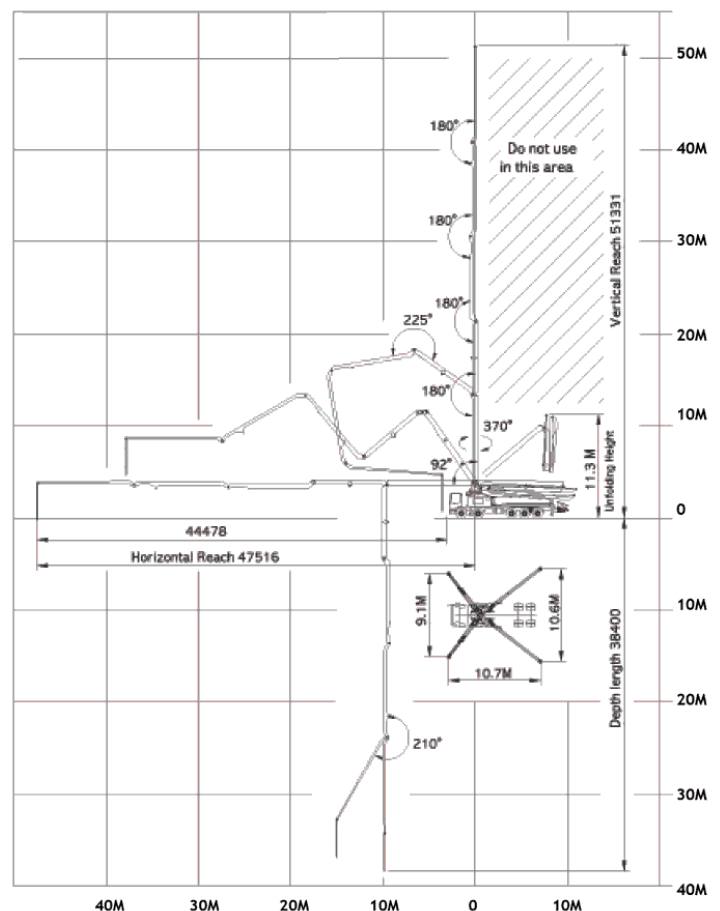

STANDARD FEATURES

- 1 Radio remote control HBC
- 1 Radio remote control ITOWA
- Transfer box
- 2 Parts books
- 1 Instruction guide
- 1 Standard kit of fittings
- 1 Standard toolbox
- 1 Clamp 5½, 1 kit of rubber rings
- 2 Cleaning balls of 150
- 1 Hopper working lamp
- 1 Hopper cover
- 1 End hose 5 ½
- 1 Changing valve
- 1 Kit of relays and switches
- Air greasing device for hopper
- 1 Water cleaning device
- 1 Protection helmet

OPTIONAL FEATURES

- Water cleaning high pressure device
- Twin sized straight pipes
- Electrical vibrator
- Air pressure device